




Version: 22 August 2017

# RHODUNA<sup>®</sup>- ALLOY

## RHODIUM-RUTHENIUM ELECTROLYTE

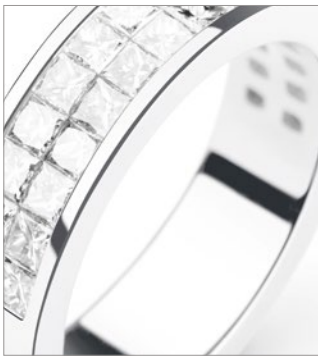

### The First Pure White Electrolytic Rhodium Alloy

RHODUNA<sup>®</sup>-Alloy is the first alloy electrolyte in the world combining the high-quality metals rhodium and ruthenium. The basic materials of the new coating are truly royal: A mixture of rhodium, one of the world's most valuable precious metal, and the platinum group metal ruthenium.

Its white colour is absolutely equivalent to that of a pure rhodium layer. The electrolyte has all the quality characteristics of high-grade rhodium coatings and surpasses them in durability and uniformity. Its good throwing power even permits the plating of parts with complex geometries. It can be directly deposited on nickel, palladium, silver and gold.

At the same time, the „White Queen“ is considerably less expensive than pure rhodium layers.



### Advantages

- Very light, white and ultra-bright coatings
- More uniform layer thickness
- Crack-free up to 1 µm
- Wide current density range
- Extremely abrasion-resistant
- Less expensive than pure rhodium layers
- Ideal for parts with complex geometries, e.g. chains
- Suitable for rack and barrel

### Applications

- Spectacle frames
- Writing implements
- Jewellery
- Watches

# RHODUNA®-ALLOY

## RHODIUM-RUTHENIUM ELECTROLYTE




### TECHNICAL SPECIFICATIONS

Electrolyte characteristics	
Electrolyte type	Strongly acidic
Metal content	1.6 (0.8 - 1.8) g/l Rh 0.4 (0.2 - 0.5) g/l Ru
pH value	< 1
Operating temperature	45 (40 - 50) °C
Current density range	4.0 (3.0 - 5.0) A/dm <sup>2</sup>
Plating speed	Approx. 0.2 µm/min at 4.0 A/dm <sup>2</sup>
Anode material	MMO (type PLATINODE® 187 S0)

Coating characteristics	
Coating	Rhodium-ruthenium
Alloy composition	75 wt. % Rh 25 % Ru
Colour of deposit	White
Brightness	Bright
Hardness of deposit HV 0.015 (Vickers) approx. values	600 - 900 HV

### Abrasion Test (Bosch-Weinmann)

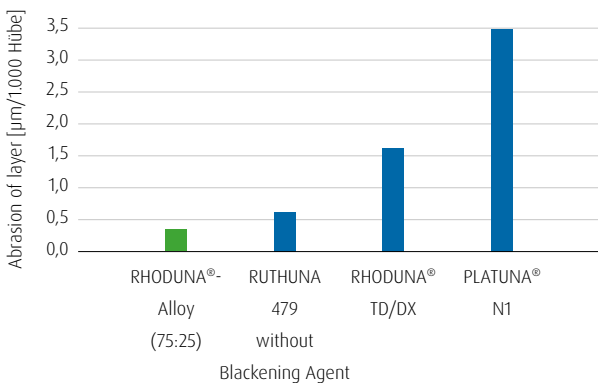

Umicore Galvanotechnik GmbH  
Klarenbergstrasse 53-79  
73525 Schwaebisch Gmuend (Germany)

Technical Support: Phone +49 7171 607-305  
Sales Department: Phone +49 7171 607-204

[www.ep.umicore.com](http://www.ep.umicore.com)

  
**umicore**  
Electroplating

The information and statements contained herein are based on our experience in the fields of research and applied technology and are believed to be accurate at the time of publication, but - unless agreed in writing - we make no warranty with respect thereto, including but not limited to any results to be obtained. This product information sheet in the English language prevails any translation.